

Micro Electrical Discharge Machining (μ EDM): Holes Drilling and Characterization of the Process Parameters

Asmae Taфраouti and Yasmina Layouni

Univ Lyon, Université Claude Bernard Lyon 1, CNRS, INSA Lyon, Ecole Centrale de Lyon, CPE Lyon, INL, UMR5270, Villeurbanne 69622, France

Abstract: μ EDM (micro-electrical discharge machining) is a process for machining conductive materials without mechanical contact; it is particularly suitable for machining hard materials. The principle consists in creating electrical discharges between a micro-tool and a workpiece, both of which are immersed in a dielectric. It is a complementary process to mechanical, laser, micro-machining techniques, and even to techniques derived from silicon microtechnology (RIE, DRIE, LIGA). However, the resolution of μ EDM is limited; it depends on several electrical and physical parameters. The goal of this paper is to characterize the holes obtained by drilling using μ EDM with different micro-tool diameters ($\Phi = 250 \mu\text{m}$; $\Phi = 80 \mu\text{m}$; $\Phi = 40 \mu\text{m}$; $\Phi = 20 \mu\text{m}$) for an experimental time of $t = 2 \text{ h}$. The results obtained let us conclude that a large diameter micro-tool ($\Phi = 250 \mu\text{m}$) leads to removing a larger amount of material ($43 \times 10^5 \mu\text{m}^3$) than small diameters: $\Phi = 80 \mu\text{m}$; $\Phi = 40 \mu\text{m}$; $\Phi = 20 \mu\text{m}$ where the removed volume is equal to $2.6 \times 10^5 \mu\text{m}^3$; $10^5 \mu\text{m}^3$; $0.4 \times 10^5 \mu\text{m}^3$, respectively. The electrode-tool diameter influences the maximum depth of the holes; a diameter of $\Phi = 250 \mu\text{m}$ generates a hole where the maximum depth is $170 \mu\text{m}$ while small diameters: $\Phi = 80 \mu\text{m}$; $\Phi = 40 \mu\text{m}$; $\Phi = 20 \mu\text{m}$ provide holes with a depth of $82 \mu\text{m}$; $51 \mu\text{m}$; $50 \mu\text{m}$ respectively. Through these experiments, we can also conclude that the lateral gap of the holes is almost constant. It is about $40 \mu\text{m}$ whatever the diameter.

Key words: μ EDM, electrical discharges, hole drilling, amount of removed material.

1. Introduction

Microfabrication techniques are widely used in several applications: medical components [1], micro-pieces and molds [2], microfluidic [3], microelectronics [4], etc. They are based, generally, on mechanical or laser micro-machining techniques, or techniques from silicon microtechnology (RIE, DRIE, LIGA). μ EDM (micro-electrical discharge machining) is a complementary process. It is based on the use of a cylindrical electrode-tool that runs along a predefined pattern to machine a workpiece-electrode. The two electrodes are immersed in a dielectric with a gap of a few micrometers [5]. The application of a voltage between the two electrodes leads to the generation of electrical discharges able to remove material from the two electrodes. A positive

polarization helps to remove a large amount of material from the workpiece-electrode and reduces the wear of the tool-electrode [6]. For this reason, we have used this polarization during all our experiments (drilling holes).

2. Experimental Setup

2.1 Discharges Creation

During μ EDM machining, a micro-plasma is created, and generates electrical discharges. These discharges remove a material from the workpiece, with the expulsion of debris from the two electrodes into the gap. The renewal of the dielectric and the approach of the micro-tool to the workpiece recreate the suitable conditions for new discharges. Fig. 1 illustrates the steps involved in creating the plasma. This phase (Fig. 1a) corresponds to the application of a voltage between the two electrodes [7] in order to create a strong electric field able to lead to a local

Corresponding author: Asmae Taфраouti, Ph.D. student, research fields: micromachining, nanofabrication, nanostructure.

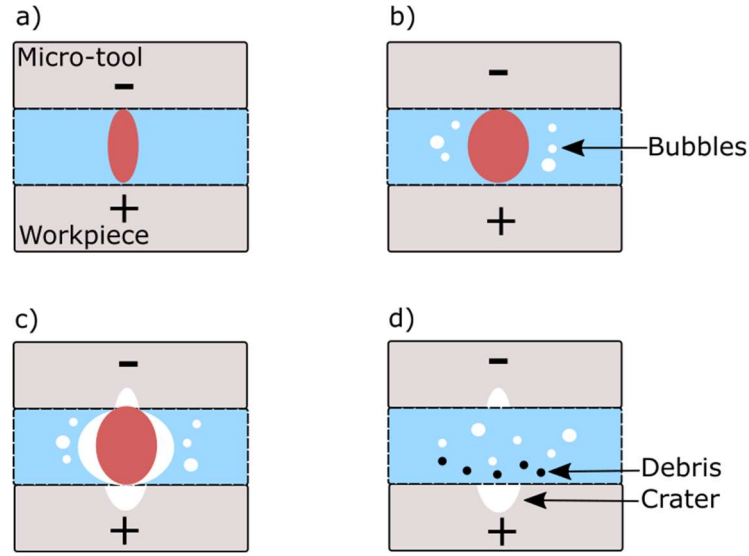


Fig. 1 Machining steps by μ EDM.

ionization of the dielectric. During this phase, there is the appearance of streamers followed by the breakdown of the dielectric and finally the appearance of the plasma [8-11]. The development of the plasma at the gap, as well as the heating of the material and the electrode by the plasma, leads to the widening of the discharge channel, which allows the passage of a high current (Figs. 1b and 1c). The last step is the implosion of the plasma due to the dielectric pressure, then its disappearance in just few microseconds (Fig. 1d). In this phase, there is also the ejection of the removed debris and the return to the initial conditions.

2.2 Test Bench

In all our experiments, we use RC generator (Fig. 2a), it is based on charging of capacitor C_c under a DC (direct current) voltage V_{EE} through a resistor R_c . When the micro-tool is sufficiently close to the workpiece (sufficiently high electric field) and the dielectric is sufficiently insulating, the energy stored in the capacitor is suddenly transferred to the gap and gives a birth of series of discharges (Fig. 2b). An oscilloscope is used to record, in real time, the voltage and the current points during the plasma breakdown (discharges) for the whole machining process.

The tool-electrode, used during our machining, is made of tungsten (99.95%) [12], because it has a high melting temperature ($T = 3,695^\circ\text{C}$) [13], which reduces its wear rate during machining. Also, its good thermal conductivity allows heat to be dissipated quickly. We use stainless steel for the workpiece-electrode because it has a low melting temperature ($T = 1,510^\circ\text{C}$) [13] and a low thermal diffusivity, which allows the energy of the discharges to be diffused locally.

Before machining, we do a mechanical polishing of the workpiece, where several seed papers of different sizes are used. The goal of this step is to obtain a workpiece with a low roughness and a shiny surface.

2.3 Protocol Used in Experiments

In order to characterize the discharges during machining, we have set up a protocol that allows:

- determining the initial gap, in order to ensure the same experimental conditions;
- determining the volume of the removed material during the holes drilling.

2.3.1 Gap Determination

Before starting a workpiece machining, we perform a preliminary step in order to determine the breakdown gap in specific conditions. The goal is to ensure the same gap between the two electrodes. To

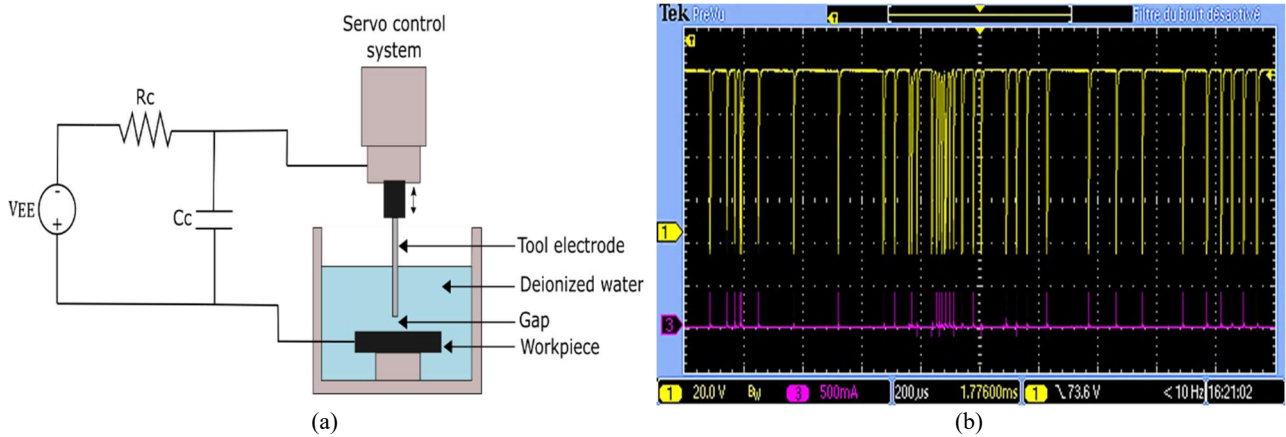


Fig. 2 (a) Maching bench; (b) serie of discharges for $V_{EE} = 75$ V and $C_c = 10$ nF.

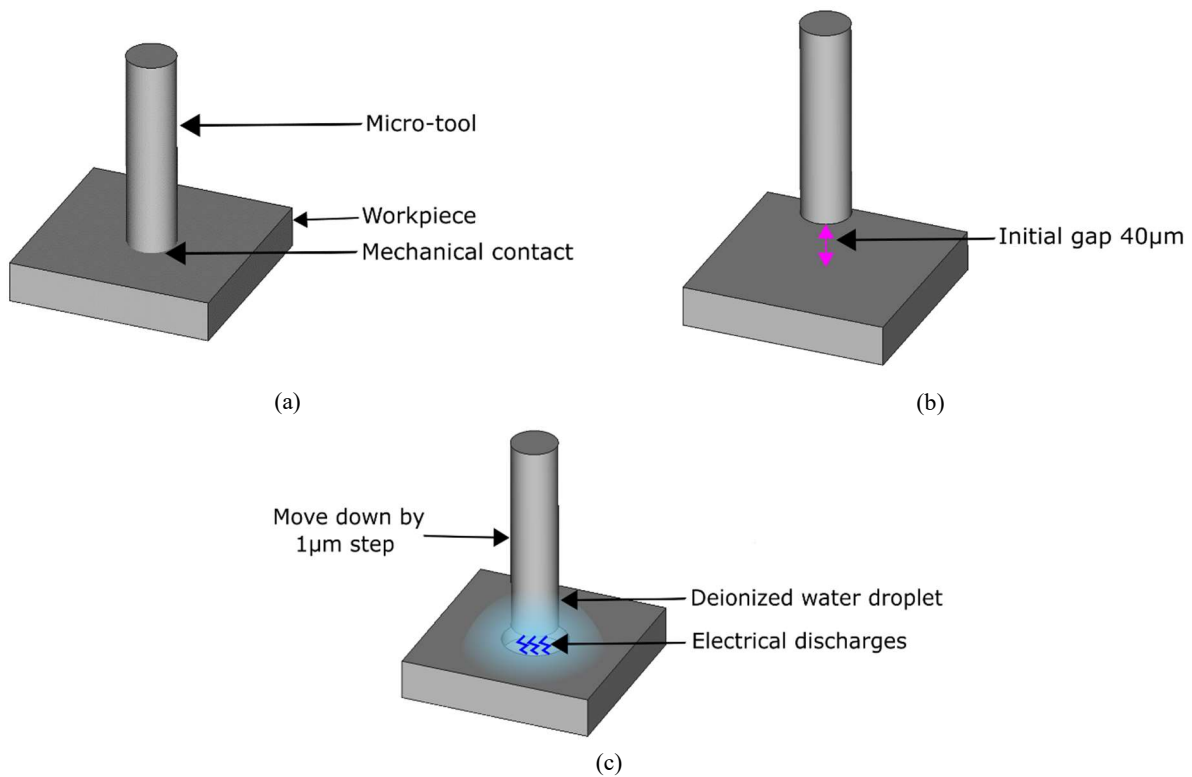


Fig. 3 Process of the gap determination. (a) Mechanical contact; (b) move up the micro-tool with 40 μ m; (c) move down the micro-tool by 1 μ m step.

do this, we follow the steps described in (Fig. 2): (1) apply, in air, a voltage of 1 V between the two electrodes, (2) move down the tool-electrode with a step of 1 μ m until a mechanical/electrical contact is detected, (3) move the tool-electrode up by a distance of 40 μ m, this is the reference. At this distance, we have no discharge (no plasma creation for a machining voltage < 75 V and a micro-tool diameter

$\Phi < 250$ μ m). Once the reference is determined, we apply a voltage between the micro-tool and the workpiece (example: $V_{EE} = 25$ V), we add deionized water. And we move down, with the help of a piezoelectric motor, the electrode-tool by steps of 1 μ m until the creation of the plasma (breakdown or implosion of the plasma: series of discharges occur and extinguish after a few micro-seconds).

The implosion of the plasma causes a local fusion of the material on the surface of the workpiece, forming a small crater. After the implosion, the gap is no longer the same and there are no more discharges. Once the discharges disappear, we turn off the generator, and we rinse the debris with deionized water in order to evacuate the removed material and clean the tool-electrode. At the end, the micro-tool is raised for a certain distance. The experiment is repeated 3 times.

2.3.2 Calculation of the Removed Volume

In order to know the removed volume for each hole, a profilometer was used. It gives the hole's depth according to the width (Fig. 4). Eq. (1) estimates the removed volume. In order to simplify the calculation, we consider that the hole has the shape of a truncated cone.

$$V_{\text{enlevé}} = \pi \int_{z_{\min}}^{z_{\max}} R(z)^2 dz \quad (1)$$

$R(z)$ is the radius of the circle, which depends on the depth z .

2.3.3 Lateral Gap Determination

During the hole drilling, the width of the hole is greater than the diameter of the micro-tool, this problem is inherent to micro-EDM machining. The lateral gap is the distance between the micro-tool and the workpiece on each side, and it is caused by the discharge around the micro-tool. In the ideal case, the lateral gap is the same for a given crater. However, in practice it is different, as is the case in our experiments. Therefore, the machining resolution is limited and it is defined by the tool width and the dimensions of the interaction zone between the micro-tool and the workpiece. It is characterized by the dimensional parameters: lateral gap (γ_L) and vertical gap (γ_V) as shown in Fig. 5.

2.3.4 Machining Conditions

In order to drill holes by μEDM, the machining conditions used are summarized in Table 1.

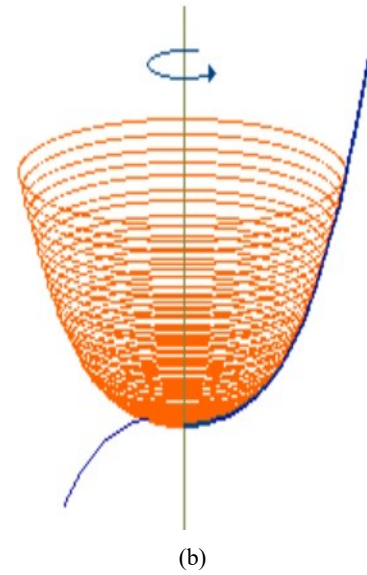
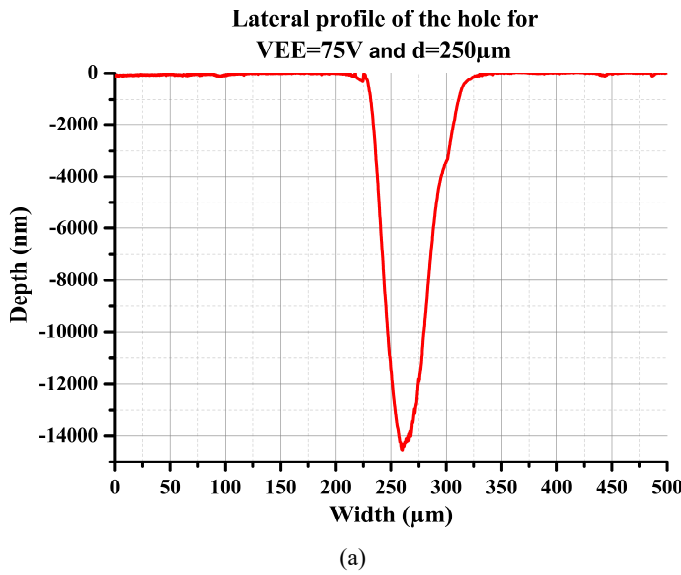


Fig. 4 (a) Crater profile obtained after the first pass of machining for $V_{EE} = 75 \text{ V}$ and $\Phi = 250 \text{ μm}$, (b) The crater shape modelization.

Table 1 Machining conditions.

Electrical conditions	Geometrical and physical conditions
$V_{EE} = 50 \text{ V}$	Tungsten micro-tools diameter: $\Phi = 250 \text{ μm}$; $\Phi = 80 \text{ μm}$; $\Phi = 40 \text{ μm}$; $\Phi = 20 \text{ μm}$
$C_c = 10 \text{ nF}$	Steel workpiece: $20 \times 20 \times 0.5 \text{ mm}^3$
$R_c = 500 \text{ Ω}$	Deionized water; gap after the first breakdown = $10 \text{ μm} \pm 2 \text{ μm}$

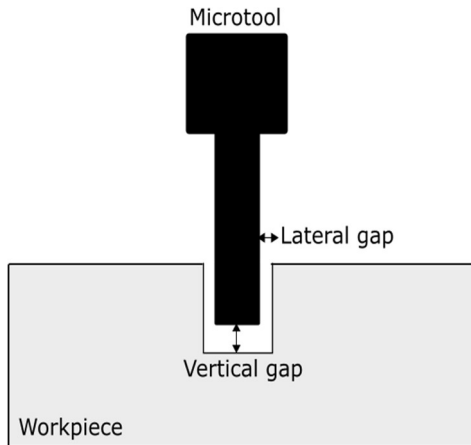


Fig. 5 Lateral and vertical gap diagram.

3. Results and Discussion

3.1 Drilling Holes with Different Micro-tool Diameters

The choice of the applied voltage ($V_{EE} = 50$ V) for drilling holes is based on the results of a previous study where we have analyzed the effect of the voltage on the machining performances [14]. Compared to these voltages ($V_{EE} = 25$ V; $V_{EE} = 75$ V), the voltage of 50 V has given satisfactory results: a significant removed volume from the workpiece with lower wear of the micro-tool and little

rough surface of the craters. Based on these results, we have done the hole drilling with different micro-tools diameters ($\Phi = 250$ μ m; $\Phi = 80$ μ m; $\Phi = 40$ μ m; $\Phi = 20$ μ m).

The protocol, followed during drilling, is described in Fig. 3. It is used at the beginning of each new experiment. In order to ensure the birth of new discharges: (1) a cleaning with deionized water is used after each breakdown (a series of discharges) in order to remove debris, (2) the electrode-tool is moved down by a step of 1 μ m until a new breakdown is obtained. The process with the two steps is repeated until the end of the desired machining time.

Fig. 6 shows the 4 holes obtained, we note that the hole shape is circular on the surface for the different micro-tool diameters, their geometric characterization (lateral gap and depth) is presented in the following paragraphs.

3.2 Lateral Profile of the Obtained Holes

In order to determine the shape and the depth of the obtained holes, we used a profilometer. Fig. 7 represents the four profiles obtained for the different

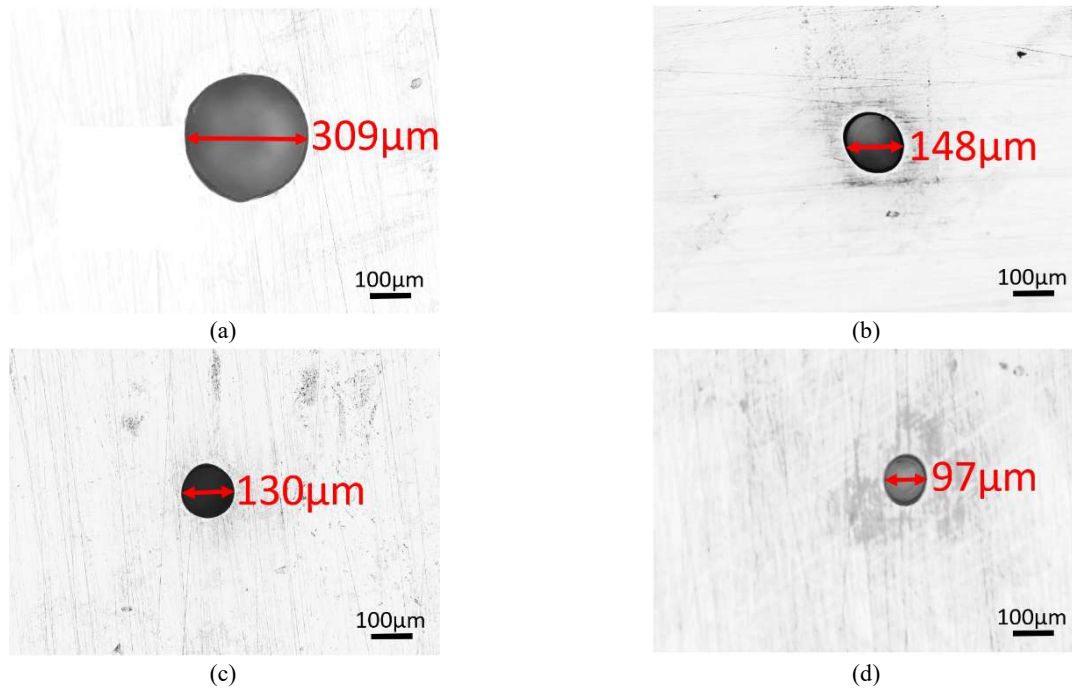


Fig. 6 Hole drilling with different micro-tool diameters: (a) $\Phi = 250$ μ m ; (b) $\Phi = 80$ μ m ; (c) $\Phi = 40$ μ m ; (d) $\Phi = 20$ μ m.

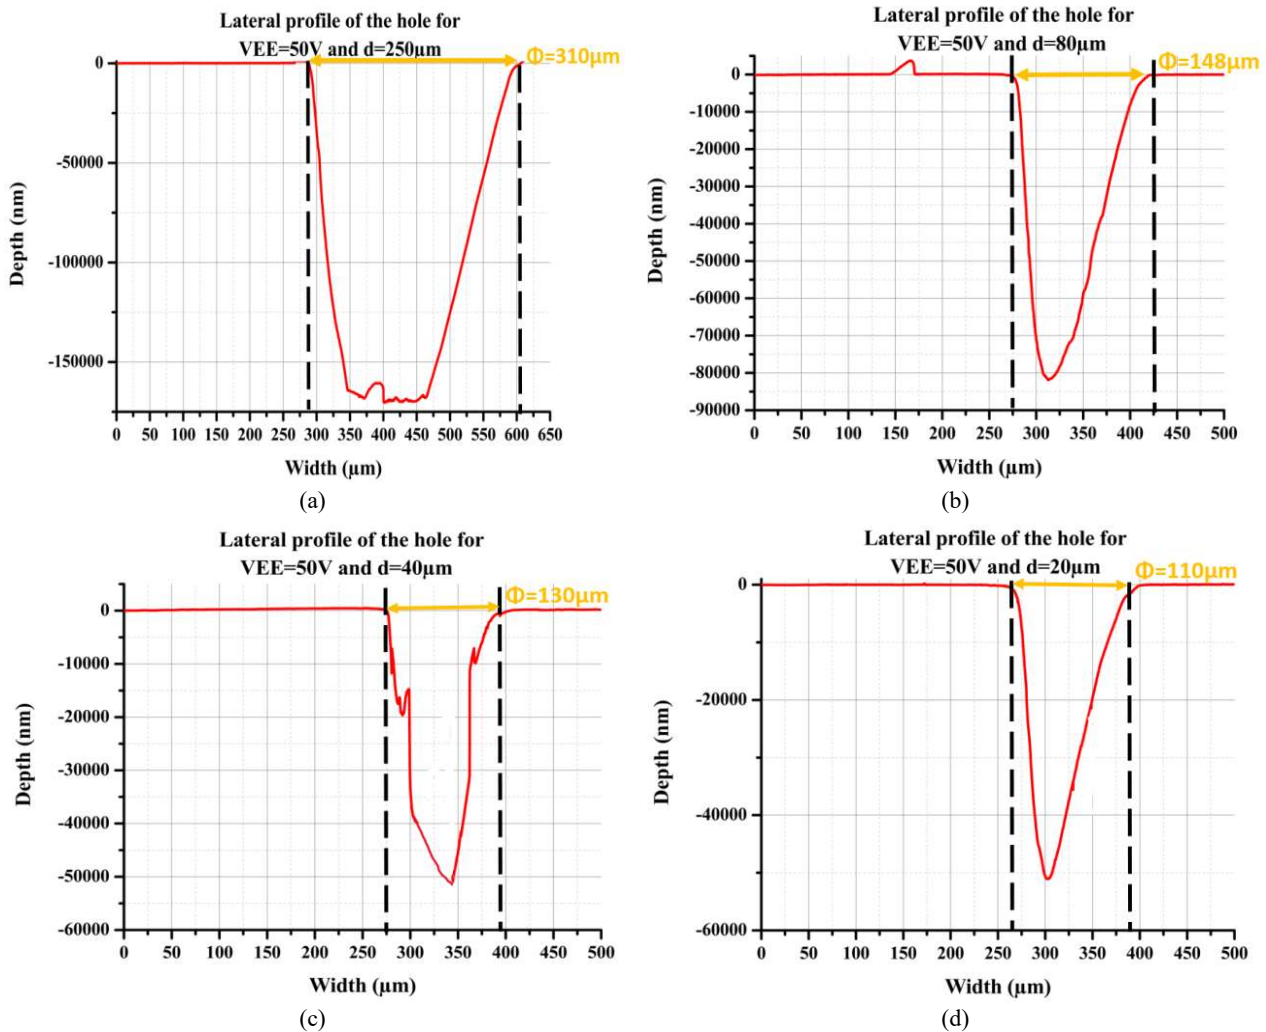


Fig. 7 Profile of holes drilled by micro-tools with diameter of: (a) $\Phi = 250 \mu\text{m}$; (b) $\Phi = 80 \mu\text{m}$; (c) $\Phi = 40 \mu\text{m}$; $\Phi = 20 \mu\text{m}$.

Table 2 Characteristics of the obtained holes.

Micro-tool diameter (μm)	Max. depth (μm)	Lateral gap (μm)	Removed volume (μm^3)
250	170	30	43×10^5
80	82	34	2.6×10^5
40	51	45	10^5
20	50	45	0.4×10^5

micro-tool diameters. We can see that the micro-tool with diameter of $\Phi = 250 \mu\text{m}$ gives holes with a greater depth than the small diameters ($\Phi = 80 \mu\text{m}$; $\Phi = 40 \mu\text{m}$; $\Phi = 20 \mu\text{m}$) because an important amount of material is removed. And the shape of the hole, at depth, is less conical in this case. The hypothesis is that the bottom of the micro-tool is less worn for a $250 \mu\text{m}$ wire than for small micro-tool diameters ($\Phi = 80 \mu\text{m}$; $\Phi = 40 \mu\text{m}$; $\Phi = 20 \mu\text{m}$). In the case of

a micro-tool with a diameter of $\Phi = 20 \mu\text{m}$, the wear is greater, which justifies the conical shape of the hole.

3.3 Lateral Gap and Maximum Depth for the Different Obtained Holes

Table 2 summarizes the geometric characteristics of the four holes. The removed volume is equal to $43 \times 10^5 \mu\text{m}^3$; $2.6 \times 10^5 \mu\text{m}^3$; $10^5 \mu\text{m}^3$; $0.4 \times 10^5 \mu\text{m}^3$

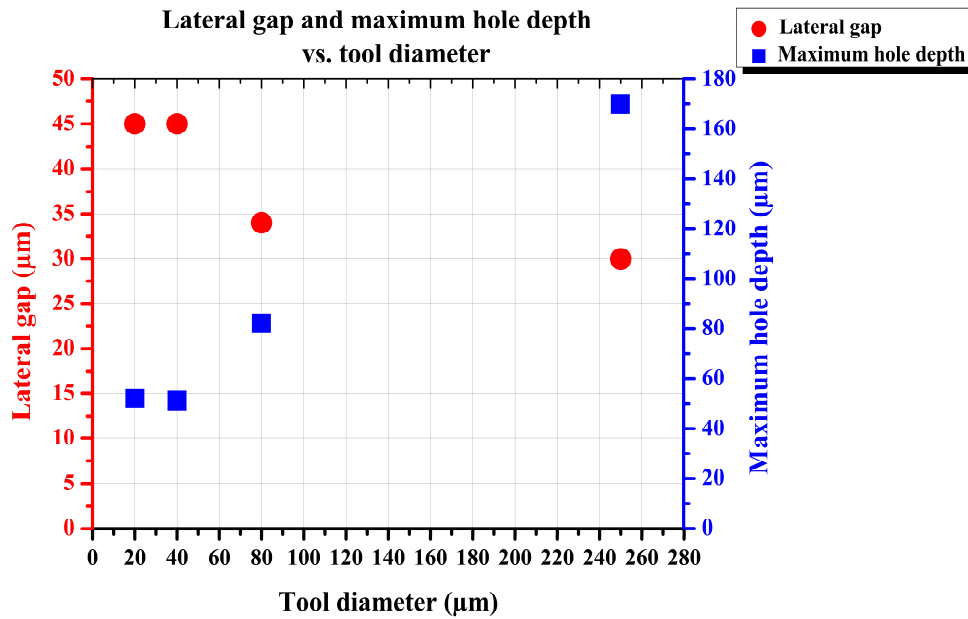


Fig. 8 Lateral gap and maximum hole depth for the different micro-tool diameters.

for micro-tools diameter $\Phi = 250 \mu\text{m}$, $\Phi = 80 \mu\text{m}$, $\Phi = 40 \mu\text{m}$, $\Phi = 20 \mu\text{m}$, respectively. We can see that for the hole where the micro-tool has a diameter of $\Phi = 250 \mu\text{m}$, the removed volume and the hole depth are important because the facing area of the two electrodes (micro-tool/workpiece) is important, too. However, the lateral gap is larger for small diameters ($\Phi = 40 \mu\text{m}$, $\Phi = 20 \mu\text{m}$) compared to micro-tools diameter $\Phi \geq 80 \mu\text{m}$.

Fig. 8 represents the variation of the lateral gap and the maximum depth for the four holes obtained. As previously described, the micro-tools with a large diameter lead to removing high amount of material and even to machining deeply ($170 \mu\text{m}$ for a $\Phi = 250 \mu\text{m}$ micro-tool) than in the case of small micro-tool diameters. Also, it can be seen that the smaller the diameter, the larger the lateral gap.

4. Conclusion

The holes drilling by μ EDM in these conditions: an applied voltage of $V_{EE} = 50 \text{ V}$ and micro-tools with different diameters ($\Phi = 250 \mu\text{m}$, $\Phi = 80 \mu\text{m}$, $\Phi = 40 \mu\text{m}$, $\Phi = 20 \mu\text{m}$), gave us the correlation existing between the removed volume, the maximum hole

depth and the lateral gap. This lateral gap, which is inherent to the machining method, increases when using micro-tools with small diameter. So, to reduce the lateral gap, we propose to sheath the tool-electrode in order to prevent lateral discharges inside the hole. The results of this study will lead us, in a short term, to machine channels of greater length and depth.

References

- [1] Mhanna, R., Qiu, F., Zhang, L., Ding, Y., Sugihara, K., Zenobi-Wong, M., and Nelson, B. J. 2014. "Artificial Bacterial Flagella for Remote-Controlled Targeted Single-Cell Drug Delivery." *Small* 10: 1953-7.
- [2] Uhlmann, E., Piltz, S., and Doll, U. 2005. "Machining of Micro/Miniature Dies and Moulds by Electrical Discharge Machining." *J. Mat. Proc. Tech.* 167: 488-93.
- [3] Ait-Ali, I., Morin, P., Semet, V., Cabrera, M., and Ferrigno, R. 2012. "High Precision Machining Strategy for the Integration of Electrochemical Cells in Cyclic Olefin Copolymer Microfluidic Devices." *Procedia Engineering* 47: 450-3.
- [4] Lin, J., Zhang, C., Yan, Z., Zhu, Y., Peng, Z., Hauge, R., Natelson, D., and Tour, J. 2013. "3-Dimensional Graphene Carbon Nanotube Carpet-Based Microsupercapacitors with High Electrochemical Performance." *Nano Lett.* 13: 72-8.
- [5] Dahmani, R. 2015. *Optimization of a μ EDM Process*. Lyon: UCBL.

- [6] Oelhelt, S. 2006. *L' électroérosion par enfonçage*. (in French)
- [7] Bianchi, L., and Regal, E. 1987. "Usinage par électroérosion." *Tech. L'ingénieur B 73* (10): 2-24.
- [8] Aka-Ngnui, T., and Beroual, A. 2001. "Bubble Dynamics and Transition into Streamers in Liquid Dielectrics under a High Divergent Electric Field." *J. Phys. D. Appl. Phys.* 34: 1408-12.
- [9] Qian, J., Joshi, R. P., Schamiloglu, E., Gaudet, J., Woodworth, J. R., and Lehr, J. 2006. "Analysis of Polarity Effects in the Electrical Breakdown of Liquids." *J. Phys. D. Appl. Phys.* 39: 359-69.
- [10] Qian, J., Joshi, R. P., Kolb, J., and Schoenbach, K. H. 2005. "Microbubble-Based Model Analysis of Liquid Breakdown Initiation by a Submicrosecond Pulse." *J. Appl. Phys.* 97: 113304.
- [11] Descoeudres, A. 2006. "Characterization of Electrical Discharge Machining Plasmas." PhD thesis, l'Ecole Polytechnique Fédérale de Lausanne. (in French)
- [12] Jahan, M. P., Wong, Y. S., and Rahman, M. 2009. "A Study on the Quality Micro-hole Machining of Tungsten Carbide." *Journal of Materials Processing Technology* 209 (4): 1706-16.
- [13] Goodfellow, Tungsten. <https://www.goodfellow.com>.
- [14] Girardin, G. 2013. "Development of a μ EDM Process." PhD thesis, UCBL.